



FORNAX T LED

Freestanding Luminaires



Images for the product family and options:

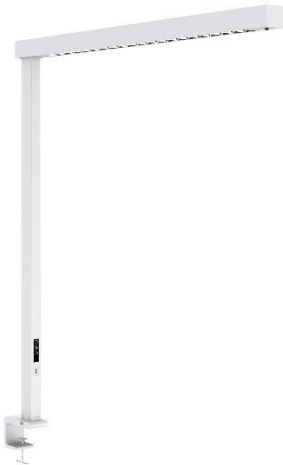

Description:	Table clamp-on LED luminaire Light distribution type: direct/indirect Optical system: double parabolic reflector with lenses, UGR<16 Housing: aluminum Colour: grey (RAL9006)
General data:	Mains voltage: 220-240V, 50/60Hz LED lifetime, h: 50000/L80B20 SDCM: 5 Protection class IEC: I Ingress protection code: IP20 Mechanical impact resistance: IK02 Operating temperature range, °C: ta -10...+40
Installation:	Clamp-on. Cable 2.8m with plug, Schuko type
Environment:	Indoor
Application:	Office, education

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI * (Ra)	CCT*, K	Weight, kg
Fornax T LED1x10500 J870 T840 L1A15 DIM PIR RAL9016 Schuko-2.8m	1060	60/70	53/1300	10000	80,0	125	80	4000	5,10
Fornax T LED1x10500 J870 T840 L1A15 DIM PIR RAL9006 Schuko-2.8m	1060	60/70	53/1300	10000	80,0	125	80	4000	5,10
Fornax T LED1x10500 J870 T840 L1A15 DIM PIR RAL9005 Schuko-2.8m	1060	60/70	53/1300	10000	80,0	125	80	4000	5,10

*Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

*Photos are for illustrational purposes only. The exact appearance of the product may vary depending on the monitor settings, options selected and other factors.

Available options:	
T830	Colour temperature 3000K, CRI 80+
T840	Colour temperature 4000K, CRI 80+